



Attention! Any incorrect actions with engine and transmission control units can lead to their failure . You are using BitBox software at your own risk.

Our team are not responsible for data loss, damages, loss of profits or any other kind of loss while using (or misusing) BitBox software.

FID 264: PSA Delphi DCM7.1A TC297 6MB CAN BSL [SM2/SM3 ONLY]

Overview

Module for reading and writing Delphi DCM7.1A TC297 ECU used in diesel PSA vehicles.

Module: PSA diesel CAN

MCU: TC297

Memory: 6MB

Allows reading and writing full flash area with checksum correction in BSL mode.

Attention! All tested adapters with automatic power management available by this link below. Please check this manual, if you have any questions contact support@bitbox.ru Also check boot pin 9 or 12 in settings.

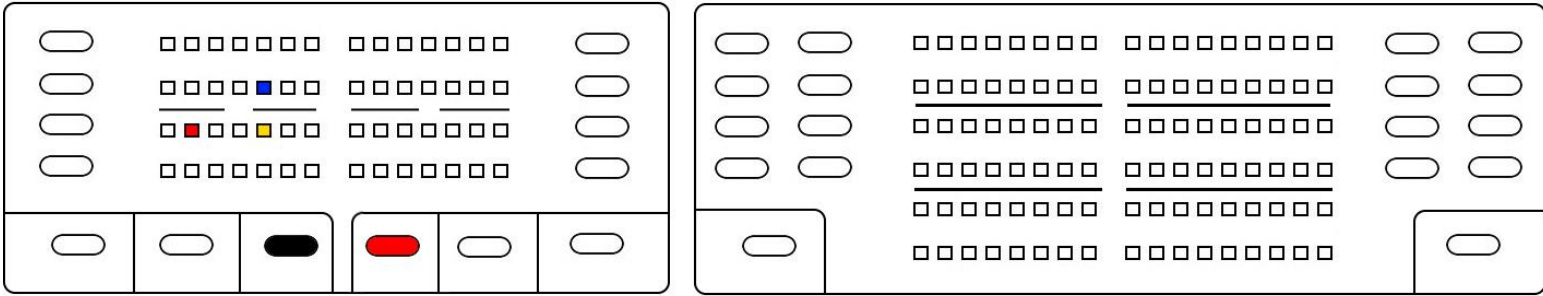
<http://archive.powertuner.net/bitbox/help/SimosAdapters.pdf>







Attention! Any incorrect actions with engine and transmission control units can lead to their failure . You are using BitBox software at your own risk.

Our team are not responsible for data loss, damages, loss of profits or any other kind of loss while using (or misusing) BitBox software.

External connection



-  Ground
-  Power
-  Can-H
-  Can-L



Attention! Any incorrect actions with engine and transmission control units can lead to their failure . You are using BitBox software at your own risk.

Our team are not responsible for data loss, damages, loss of profits or any other kind of loss while using (or misusing) BitBox software.

Internal connection

Solder GPT1 (first pin of OBD) from adapter with automatic power management to the pin as show on picture below. Also check boot pin 9 or 12 in settings.

GPT1 - 1pin OBD

BOOT pin (grey alligator)

